



Prebit high-power interior led lighting combines energy-saving leds with a modern design. Mark our words: you will definitely find the lighting that meets your needs!


High-power led

High-power led means a high output of light, but low electricity consumption and little heat development. The leds have a guaranteed long lifetime of approximately 50,000 burning hours. For this number of burning hours you would need 50 light bulbs or 12 halogens. Prebit led lighting is suitable for a multivolt power source of 12 till 30 V DC. This makes this lighting suitable for almost every vessel.

Lighting Groups and group dimming

If multiple luminaires are in one space, it's often desirable to switch several lights on or off simultaneously or to dim one group at once. With Prebit lighting this is very simple, which is unique. The so-called "Master and Slave" system builds a lighting group quickly and easily. The master luminaire is the leader of the group, through this fixture you can turn a group on or off, or dim the lights of the group. The Slave luminaires follow the Master and are therefore not independently operable. Both master and slave luminaires can also be mounted as "stand alone". For Slave luminaires you always need an external switch then. The master can be used without external switch. If you want to turn on (or off) the Master at two locations, you have to mount an external switch with the Master.

The following wiring diagram shows you how to apply Prebit lighting in a group. Because the schedule is so intelligent and simple, this system saves a lot of installation time. It is also possible to control the group dimming with the Masterbus system. For more information ask our Parts sales team.

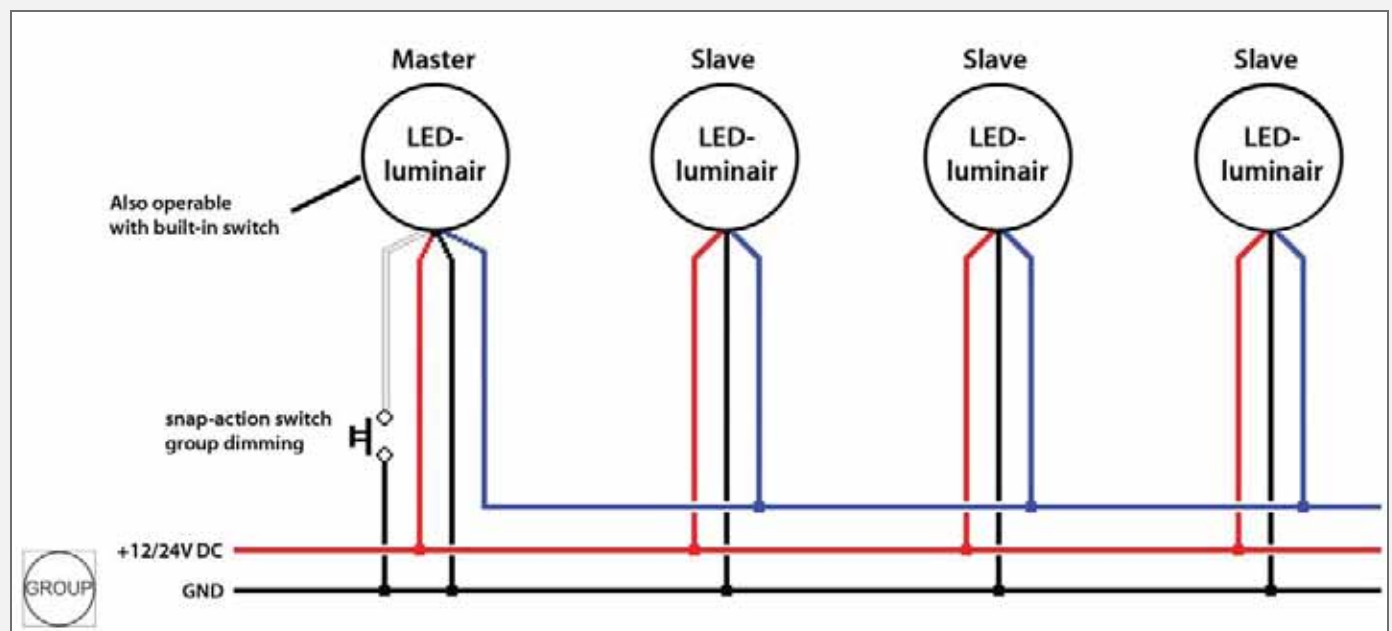



New

Prebit Wall / ceiling light

Type W10

This modern light is available with lampshades in three colours. The light colour is warm white. The shade can be rotated. With the soft-touch dim switch the light can be dimmed steplessly.

Dimensions:
Support Ø x h : 55 x 20 mm
Lampshade Ø x l : 37-61 x 96 mm
Brightness : 670 Lumens

Colour	Colour lampshade	LED	Colour light	Cat.no.
Chrome	White	3x 1W	Warm white	25014103
Chrome	Grey	3x 1W	Warm white	25014101
Chrome	Brown	3x 1W	Warm white	25014105

Prebit Wall / ceiling light

Type R1-1

This modern light is available with lampshades in three colours. The light colour is warm white. The shade can be rotated. With the soft-touch dim switch the light can be dimmed steplessly.

Dimensions:
Support Ø x h : 55 x 20 mm
Lampshade Ø x l : 37-61 x 96 mm
Brightness : 225 Lumens



Colour	Colour lampshade	LED	Colour light	Cat.no.
Chrome	White	3x 1W	Warm white	20011905
Chrome	Grey	3x 1W	Warm white	20012105
Chrome	Brown	3x 1W	Warm white	20012305
Chrome matt	White	3x 1W	Warm white	20011907
Chrome matt	Grey	3x 1W	Warm white	20012107
Chrome matt	Brown	3x 1W	Warm white	20012307
Gold	White	3x 1W	Warm white	20011909
Gold	Grey	3x 1W	Warm white	20012109
Gold	Brown	3x 1W	Warm white	20012309



Prebit Wall light

Type W6

This wall light features high-power LEDs with a pleasantly warm white colour. The lamp can swivel 20°. With the soft-touch switch the light can be dimmed easily.

Dimensions:
Support Ø x h : 55 x 20 mm
Light total l x h : 140 x 230 mm
Ø lampshade : 37,5 mm
Brightness : 310 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	3x 2W	Warm white	20016105
Chrome matt	3x 2W	Warm white	20016107
Gold	3x 2W	Warm white	20016109



Prebit Wall / ceiling light

Type R2-1

This LED-light for mounting on wall or ceiling includes high-power LED's with neutral white coloured light. The light can be rotated. With the integrated switch, the light can be dimmed.

Dimensions:
Support Ø x h : 55 x 20 mm
Light total l x h : 123 x 66 mm
Ø lampshade : 60 mm
Brightness : 355 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	3x 3W	Warm white	20002605
Chrome matt	3x 3W	Warm white	20002607



Prebit Wall / ceiling light

Type R4

Type R4 has a beam angle of 25°. The lightshade can be rotated. With the soft-touch switch the warm white light can be dimmed easily.

Dimensions:
Support Ø x h : 55 x 20 mm
Light total l x h : 95 x 55 mm
Ø lampshade : 28 mm
Brightness : 140 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	1x 3W	Warm white	20525105
Chrome matt	1x 3W	Warm white	20525107



Prebit Wall / ceiling light

Type UB01

This trendy light can be used as ceiling light, wall light, or can be mounted e.g. under kitchen cabinets. In this way, your kitchen sink (or your desk) will be illuminated in a proper way. Comes complete with integrated dim switch.

Dimensions:
L x w x h : 300 x 32 x 14 mm
Brightness : 450 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	6x 1W	Warm white	21833105
Chrome matt	6x 1W	Warm white	21833107
Gold	6x 1W	Warm white	21833109



Prebit Wall / ceiling light

Type UB01 - 3

The ceiling light UB01 - 3 has the advantage that it is tilted. The light can rotate 270°, is dimmable and has 6 LEDs. Ideal to relieve your entire worksheet.

Dimensions:
L x w x h : 334 x 35 x 37,5 mm
Brightness : 450 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	6x 1W	Warm white	21873105
Chrome matt	6x 1W	Warm white	21873107
Gold	6x 1W	Warm white	21873109



Prebit Wall / ceiling light

Type UB02 - 3

This contemporary ceiling lamp type UB02 UB01-3-3 is, like the UB01 - 3, tilted. Both lights can rotate 270 ° and are dimmable. The UB02 -3 is very compact, because he has 3 LEDs.

Dimensions:
L x w x h : 185 x 35 x 37,5 mm
Brightness : 225 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	3x 1W	Warm white	21973105
Chrome matt	3x 1W	Warm white	21973107
Gold	3x 1W	Warm white	21973109



Prebit Wall light

Type W1-1

The modern wall light type W1-1 includes three high-power LED's with a warm white coloured light. Can be dimmed steplessly by means of the integrated switch.

Dimensions:
Support Ø x h : 55 x 20 mm
Lampshade Ø x h : 37 x 110 mm
Brightness : 225 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	3x 1W	Warm white	20012005
Chrome matt	3x 1W	Warm white	20012007



Prebit Wall light

Type W2

This modern wall light has warm white light. The light is equipped with a soft-touch switch to dim.

Dimensions:
Support Ø x h : 55 x 20 mm
Lampshade Ø x h : 37.5 x 201 mm
Brightness : 410 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	6x 1W	Warm white	20012905
Chrome matt	6x 1W	Warm white	20012907
Gold	6x 1W	Warm white	20012909



Prebit Rings for wall/ceiling lights

Ring ADR92

These rings are designed to finish the prebit wall/ceiling lights neat. It prevents visible traces of previous mounting. You can also make combinations with different designs lamps and rings. The picture shows a shiny chrome wall light with a shiny chrome ring.

Dimensions:
ØD : 92 mm

Colour	Cat.no.
Chrome	50002409
Chrome matt	50002407
Gold	50002405



Prebit Ceiling light

Series D1

These lamps have a satin acrylic construction, making the space comfortable illuminated. Available in three types. Type D1-1 (slave) has no dimmer; with both types D1-2 (master) and D1-3 the light can be steplessly dimmed. Through the master-slave system, you can use the D1-2 (Master) to dim several D1-1 (slaves). With type D1-3 you can switch between red light and warm white light. Red light is ideal during the night. Maps and instruments are well readable, but you also have a clear view outside.

Dimensions:
 Ø x h : 60 x 20 mm
 Brightness : 225 Lumens

Type	Colour	LED	Colour light	Cat.no.
D1-1	Chrome*	3x 1W	Warm white	23123105
D1-1	Chrome matt*	3x 1W	Warm white	23123107
D1-1	Gold*	3x 1W	Warm white	23123109
D1-2	Chrome	3x 1W	Warm white	23143105
D1-2	Chrome matt	3x 1W	Warm white	23143107
D1-2	Gold	3x 1W	Warm white	23143109
D1-3	Chrome	3x 1W	Warm white / red	20963105
D1-3	Chrome matt	3x 1W	Warm white / red	20963107
D1-3	Gold	3x 1W	Warm white / red	20963109

*no dim function



Prebit Ceiling light

Type D2-2

This ceiling light has nine high-power LED's. The luminosity of the LED's is comparable with a regular 60W bulb. The colour of the light is warm white. Equipped with a dim function.

Dimensions:
 Ø x h : 110 x 36 mm
 Brightness : 670 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	9x 1W	Warm white	21523105
Chrome matt	9x 1W	Warm white	21523107
Gold	9x 1W	Warm white	21523109



Prebit Ceiling light - spot

Series EB12-1 (Slave) and type EB22-1 (Slave)

This series of spots have LEDs hidden behind satin acrylic glass, to spread an even softer light. These types have no dimmer. When this type is combined with the EB12-2 (master) or EB22-2 (Master), these lights can be dimmed. The EB12-1 has three LED lights. The EB22-1 is a bigger light and has six LEDs.

Dimensions EB 12-1 (Slave):
 Ø x h : 70 x 3,5 mm
 Built-in dimensions Ø x d : 60 x 18 mm
 Brightness : 225 Lumens

Dimensions EB 22-1 (Slave):
 Ø x h : 110 x 4,75 mm
 Built-in dimensions Ø x d : 90 x 23 mm
 Brightness : 450 Lumens

Type	Colour	LED	Colour light	Cat.no.
EB12-1	Chrome matt	3x 1W	Warm white	22923107
EB12-1	Gold	3x 1W	Warm white	22923109
EB12-1	Chrome	3x 1W	Warm white	22923105
EB22-1	Chrome matt	6x 1W	Warm white	22823107
EB22-1	Gold	6x 1W	Warm white	22823109
EB22-1	Chrome	6x 1W	Warm white	22823105



Prebit Ceiling light - spot

Series EB12-2 (Master) and type EB22-2 (Master)

These types are steplessly dimmable. You can connect the EB12-2 (Master) to the EB12-1 (Slave) and type EB22-2 (Master) to the EB22-1 (Slave). Through the so-called Master-Slave system you can dim multiple lights with one single button. The EB12-2 has three LED lights. The EB22-2 is a bigger light and has six LED lights.

Dimensions EB 12-2 (Master):

Ø x h : 70 x 3,5 mm
Built-in dimensions Ø x d : 60 x 18 mm
Brightness : 225 Lumens

Dimensions EB 22-2 (Slave):

Ø x h : 110 x 4,75 mm
Built-in dimensions Ø x d : 90 x 23 mm
Brightness : 450 Lumens

Type	Colour	LED	Colour light	Cat.no.
EB12-2	Chrome matt	3x 1W	Warm white	22943107
EB12-2	Gold	3x 1W	Warm white	22943109
EB12-2	Chrome	3x 1W	Warm white	22943105
EB22-2	Chrome matt	6x 1W	Warm white	22843107
EB22-2	Gold	6x 1W	Warm white	22843109
EB22-2	Chrome	6x 1W	Warm white	22843105



Prebit Ceiling light - spot


Series EB12-3

With the EB12-3 you can switch the colour between red and slightly warm light. Red light is ideal in the night. Maps and instruments remain legible, but you also have enough visibility to the outside. Each separate colour is steplessly dimmable.

Dimensions:

Ø x h : 70 x 3,5 mm
Built-in dimensions Ø x d : 60 x 18 mm
Brightness : 225 Lumens

Type	Colour	LED	Colour light	Cat.no.
EB12-3	Chrome matt	3x 1W	Warm white/red	21663107
EB12-3	Gold	3x 1W	Warm white/red	21663109
EB12-3	Chrome	3x 1W	Warm white/red	21663105

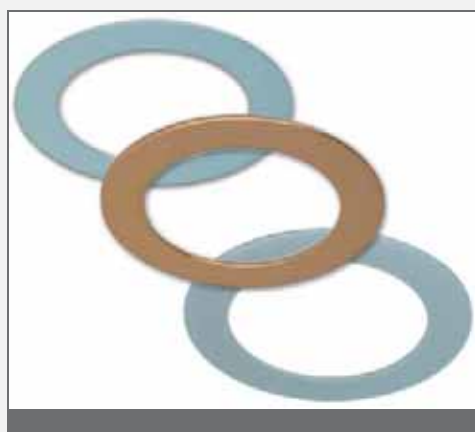

Prebit Rings for spots

Series EB12-1

These rings are designed to finish prebit spotlights neat. It prevents any visible traces of previous mounting. You can also vary these rings in design. For example, you can combine the gold spot with the chrome ring.

Dimensions:

OD : 88 mm

Type	Colour	Cat.no.
EB12-1	Chrome matt	50002307
EB12-1	Gold	50002309
EB12-1	Chrome	50002305



IP 67

Prebit Ceiling light - spot

Type EB32 and EB42 (Master and slave)

Because of the high protection class, these lights are very suitable for marine applications. These types are steplessly dimmable. You can connect the EB32-2 (Master) to the EB32-1 (Slave) and type EB42-2 (Master) to the EB42-1 (Slave). Through the so-called Master-Slave system you can dim multiple lights with one single button. The EB32 has three LED lights. The EB42 is a bigger light and has six LEDs.

Dimensions EB 32:		Dimensions EB 42:	
Ø x h	: 85 x 4,7 mm	Ø x h	: 120 x 4,7 mm
Built-in dimensions Ø x d	: 60 x 16,5 mm	Built-in dimensions Ø x d	: 90 x 22 mm
Protection class	: IP 67	Protection class	: IP 67
Brightness	: 225 Lumens	Brightness	: 450 Lumens

Type	Material	LED	Colour light	Cat.no.
EB32-1 Slave	Polished stainless steel 316	3x 1W	Warm white	23303105
EB32-2 Master	Polished stainless steel 316	3x 1W	Warm white	23303205
EB42-1 Slave	Polished stainless steel 316	6x 1W	Warm white	23304105
EB42-2 Master	Polished stainless steel 316	6x 1W	Warm white	23304205



IP 67

Prebit Ceiling light - spot

Type EB32R (Master and slave)

The EB32-R series consists of three types. The EB32-2 is the master, which is also applicable as a single light. The light is dimmable via a topping out push such as the stainless steel switch with item number 020230 and further. The EB32-1 is called a slave, which you can connect to the master in a group. The EB32-1 does not have a switch or dimmer of its own. With the EB32R-3 you can switch between white and red light. This lamp cannot be taken in a group.

Dimensions Ø x h	: 85 x 4,7 mm
Built-in dimensions Ø x d	: 60 x 15,5 mm
Protection class	: IP 67
Brightness	: 225 Lumens

Type	Material	LED	Colour light	Cat.no.
EB32R-1 Slave	Polished stainless steel 316	3x 1W	Warm white	23323105
EB32R-2 Master	Polished stainless steel 316	3x 1W	Warm white	23323205
EB32R-3	Polished stainless steel 316	3x 1W	Warm white - red	23323305
Cover ring	Polished stainless steel 316			50010032



New

Prebit Ceiling light - spot

Type 07

The flexible wall lamp 2.0: beautiful and extremely convenient to use. The flexible arm can be bent into any position and the light itself is fully rotatable. The pleasant warm white light is steplessly dimmable by a soft-touch switch on the support.

Dimensions support Ø x h	: 55 x 20 mm
Length flexible arm	: 500 mm
Lampshade Ø x l	: 15 x 104 mm
Brightness	: 225 Lumens

Material	LED	Colour light	Cat.no.
Polished stainless steel 316	1x 3W	Warm white	24710005
Polished stainless steel 316	1x 3W	Warm white	24710007



Prebit Flexible light

Type 01

This reading light has a flexible arm which can be bend in any position. The beam angle is 25°. This means the light is gathered, so you can still read on a larger distance. The warm white light makes reading a pleasure, because the light doesn't shine brightly in your eyes, nor reflects on your map or book pages. The dimmer is controlled by a soft-touch switch on the support.

Dimensions:
Support Ø x h : 55 x 20 mm
Length flexible arm : 300 mm
Lampshade Ø x l : 28 x 42 mm
Brightness : 140 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	1x 3W	Warm white	20113305
Chrome matt	1x 3W	Warm white	20113307
Gold	1x 3W	Warm white	20113309



Prebit Flexible light

Type 04

Type 04 is a flexible reading light. The shade is made of matt white glass. This reading light has a warm white coloured light, so it doesn't shine in your eyes brightly, nor reflects on the map or paper in front of you. Equipped with an integrated switch to dim.

Dimensions:
Support Ø x h : 55 x 20 mm
Length flexible arm : 300 mm
Lampshade Ø x l : 37.5 x (40.5° + 41.5) mm (" glass)
Brightness : 225 Lumens

Colour	LED	Colour light	Cat.no.
Chrome	1x 3W	Warm white	21713305
Chrome matt	1x 3W	Warm white	21713307
Gold	1x 3W	Warm white	21713309



Prebit (Map)reading light

Type 05 and F5

This light is ideal for (map)reading. Type 05 has a flexible arm which can be bowed in any position. Type 05 has a fixed light that can turn 350° and swivel 90°. The warm white light makes reading a pleasure, because the light doesn't shine brightly in your eyes, nor reflects on your map or book pages. You can also switch to red light. Each separate colour can be dimmed steplessly. The dimmer is controlled by a soft-touch switch on the support.

Dimensions:
Support Ø x h : 55 x 20 mm
Length flexible arm : 300 mm (type 05)
Lampshade Ø x l : 60 x 21.5 mm
Brightness : 225 Lumens

Type	Colour	LED	Colour light	Cat.no.
05	Chrome	3x 1W	Warm white / red	21913305
05	Chrome matt	3x 1W	Warm white / red	21913307
F5	Chrome	3x 1W	Warm white / red	21923305
F5	Chrome matt	3x 1W	Warm white / red	21923307



Jabsco Searchlights

Type SL

These Jabsco searchlights come complete with remote controls. Tough, weatherproof and corrosion resistant design. They are available in five types. Sealed beam halogen bulb. The 146 SL, 155 SL, 233 SL and 255 SL can move in two speeds, for easier searching the water surface. Supplied complete with watertight remote control for both horizontal and vertical movement by single joystick control and 2.5 m harness. For your convenience, a second control panel complete with connections can be supplied as well.

Searchlight type 233 SL is a new model with some new features. This modern light has a Spot/Flood feature, to change the beam configuration steplessly from a spot to a flood. Another unique feature is the Auto Sweep. This means the light will continuously sweep ten degrees each side of the initial target spot. This powerful dual beam searchlight comes with a more advanced control compared to the other SL types.

Type	W x l x h (mm)	Weight (kg)	Volt	Watt	Ampere	Candle power	Horizontal movement	Vertical movement	Cat. no.
135 SL	180 x 185 x 210	2.7	12	50	4	100,000	320°	75°	013001
135 SL	180 x 185 x 210	2.7	24	50	2	100,000	320°	75°	013002
146 SL	220 x 260 x 260	4.0	12	50	4	175,000	360°	60°	013011
146 SL	220 x 260 x 260	4.0	24	50	2	175,000	360°	60°	013012
155 SL	160 x 200 x 200	2.3	12	50	4	100,000	320°	75°	61050-0012
155 SL	160 x 200 x 200	2.3	12/24	50	4	100,000	320°	75°	61050-1224
233 SL	239 x 244 x 203	2.7	12	55	10	200,000	360°	27°	60233-0012
233 SL	239 x 244 x 203	2.7	24	55	5	200,000	360°	27°	60233-0024
255 SL	270 x 280 x 230	9.6	12	100	8	200,000	360°	60°	013021
255 SL	270 x 280 x 230	9.6	24	100	4	200,000	360°	60°	013022



Jabsco Searchlights

Type RC

Jabsco's chromed or brass remote controlled searchlights are available in four models. All are with a sealed beam halogen bulb, only two models RC 150 are fitted with a Xenon HID (High Intensity Discharge) bulb. With the 12V-version of the RC 130 and RC 180 you can change the beam's width by the control panel. Variable speed remote control for both horizontal and vertical movement for fast search and precise targeting, by single joystick control. The searchlights are supplied with panel and 2.5 m harness (the RC 150 includes 4.5 m harness).

Of course we can supply you with longer cables and extra controls when desired.

Type	W x l x h (mm)	Weight (kg)	Volt	Watt	Ampere	Candle power	Horizontal movement	Vertical movement	Cat. no.
RC 130	180 x 130 x 240	3.4	12	100	8.4	100,000	450°	70°	013061
RC 150	280 x 150 x 330	5.0	12/24	100	15.0	200,000	360°	70°	63022-0012
RC 180	280 x 180 x 330	4.1	12	100	8.4	200,000	450°	70°	013071
RC 180	280 x 180 x 330	4.1	24	170	7.0	230,000	450°	70°	013072
RC 200	280 x 210 x 360	5.0	24	250	7.8	500,000	450°	70°	013082

Spare parts

Exterior lighting

For Jabsco searchlights

Description	For type	Volt	Watt	Cat. no.	Description	For type	Volt	Cat. no.
Beam	135 SL	12 / 24	50	013050	Second control panel	135 SL	12 / 24	013030
Beam	146 SL	12 / 24	50	013051	Second control panel	146 SL	12 / 24	013031
Beam	155 SL	12 / 24	50	18753-0528	Second control panel	155 SL / 255 SL / RC 130 / RC 150 / RC 180	12	013031
Beam	255 SL	12 / 24	100	013052	Second control panel	255 SL / RC 150 / RC 180 / RC 200	24	013033
Beam	RC 130	12	100	013065	Second control panel	155 SL	24	64044-0000
Beam	RC 150	12 / 24	100	64046-0006	Second control panel	233 SL	12 / 24	63233-1224
HID bulb	RC 150 HID	12	35	64046-0007	Wiring cable*	3.0 m length		013040
HID bulb	RC 150 HID	24	35	64046-0008	Wiring cable*	4.5 m length		013041
Beam	RC 180	12	100	013075	Wiring cable*	7.6 m length		013042
Beam	RC 180	24	170	013076	Wiring cable*	10.7 m length		013043
Beam	RC 180	24	170	013086				

*Will fit any searchlight (except type 63022-0012)

Underwater lighting

Lumishore is a manufacturer of LED lighting. Their engineers are true specialists in developing lighting with high-quality leddrivers and Hicob Philips LEDs. This guarantees a high light quality, brightness and longevity. Lumishore gives better light than HID and normal LED underwater lights. They use widely angle lenses that provide a deep, wide and even spread of light. This allows you to achieve the same or a better effect with less lights. Lumishore underwater lighting features a soft start. Moreover they are simple and compact to mount because of the the small hole diameter. The Lumishore lighting is available in single or multi-colour change performance. Also, external control via DMX signal is possible.

Lumishore Thru Hull underwater lights are Lloyds approved for EMC / EMI.



Lumishore E-lite surfacemount Amphibious

Lumishore Underwater lighting for yachts up to 18 meters. The lighting has an output of 800 - 2300 fixture lumens, works above and below water and features ATRB Active thermal roll-back. Suitable for 9-31V with a constant light output. The SM100 is equipped with warning system for low battery voltage and polarity protection. The housing is made of corrosion-resistant polymer AOM.

Cable entry diameter : 11 mm
 Lens angle : 60° (SM100-90°)
 Protection class : IP68



Type	Total / Fixture lumens	A 12V / 24V	Weight (kg)	Dimensions h x Ø (mm)	Cable length (m)	Blue Cat. no.	Green Cat. no.	White Cat. no.
SMX20	1200 / 830	1.0 / 0.5	0.50	12.5 x 85	2	SMX20B	SMX20G	SMX20W
SMX50	1800 / 1200	1.5 / 0.75	0.70	12.5 x 85	2	SMX50B	SMX50G	SMX50W
SMX100	3600 / 2310	3.0 / 1.5	0.70	16.0 x 108	2	SMX100B	SMX100G	SMX100W



Lumishore Thru Hull

Lumishores Thru Hull under water lighting is to be mounted through the hull. The light is made of Aluminium Brass. The lens has an angle of 55 degrees and is made of toughened borosilicate. Thru Hull lights are suitable for any type of vessel. Available in red, green, blue and white light. The lights are all CE approved.

Thru hull hole : 25 mm
Voltage : multivolt (10-31V)
Protection class : IP68

Type	Total / Fixture lumens	Weight (kg)	Dimensions h x Ø (mm)	Cable length(m)	Blue Cat. no.	Green Cat. no.	Red Cat. no.	White Cat. no.
THX36	3600 / 2430	0.75	9 x 63	2	THX36B	THX36G	THX36R	THX36W
THX72	9000 / 4430	0.75	9 x 63	2	THX72B	THX72G	THX72R	THX72W
THX72FF Flushfit	9000 / 4430	2.40	33 x 90	3	THX72FFB	THX72FFG	THX72FFR	THX72FFW
THX120	18000 / 10000	3.50	33 x 120	3	THX120B	THX120G	THX120R	THX120W

Lumishore Thru Hull Colour change

The Lumishore Thru Hull Colour Change allows you to completely alter the RGB colours to your taste. It offers six preset colour modes as well, red, green, blue, magenta, cyan and white. You can have the colours change in a program as short as 30 seconds or as long as 60 minutes and everything between. The controller even features a fish attractor mode. In this mode you can adjust the frequency of the strobe or set it to random strobe, which makes the lights flash in green or blue. The Thru Hull Colour Changes comes in sets with two or four units with one controller. The controller unit is made of stainless steel 316. The light is available in both 72 and 120 Watts. The X-72 sets are used for vessels from 7 up to 23 m. For bigger yachts we recommend the use of one of the X-120 sets. The Thru Hull Colour Change is DMX ready, which allows for controlling by other systems. The housing is made of Aluminium Brass. The light is CE approved.

Colors : full spectrum
Voltage : multivolt (10-31V)
Thru hull hole : 25 mm
Protection class : IP68



Type	Total / Fixture lumens	Contents set	Weight (kg)	Cable length	Dimensions hxØ (mm)	Cat. no.
THX72-CCP-2	9000 / 4430	2 units + controller	6	3	33 x 90	TH072CCP.SET2
THX72-CCP-2 Flushfit	9000 / 4430	2 units + controller	6	3	33 x 90	TH072FFCCP.SET2
THX120-CCP-2	18000 / 10000	2 units + controller	8	3	33 x 120	TH120CCP.SET2

Lumishore Shorelite

The Shorelite was designed to Mount to a wall. This can be a pontoon, in a harbour or at diving docks. The integrated driver unit makes mounting and connecting of the light a breeze. The Shorelite is equipped with high quality Philips LEDs (100lm/Watt). This ensures a strong, bright light beam, which decreases the number of units needed. The life span at correct use is over 50000 hours. The unit is completely sealed. The housing is made of stainless steel 316. The lens has an angle of 90 degrees and is made of toughened borosilicate. Colour change is available, but only on request.

Lens angle : 90°



Type	Volt	Weight (kg)	Cable length (m)	Dimensions hxØ (mm)	Blue Cat. no.	Green Cat. no.	Red Cat. no.	White Cat. no.
X-18	12	0.6	3	25 x 63	SL018B12	SL018G12	SK018R12	SL018W12
X-36	12	0.6	3	25 x 63	SL036B12	SL036G12	SK036R12	SL036W12